




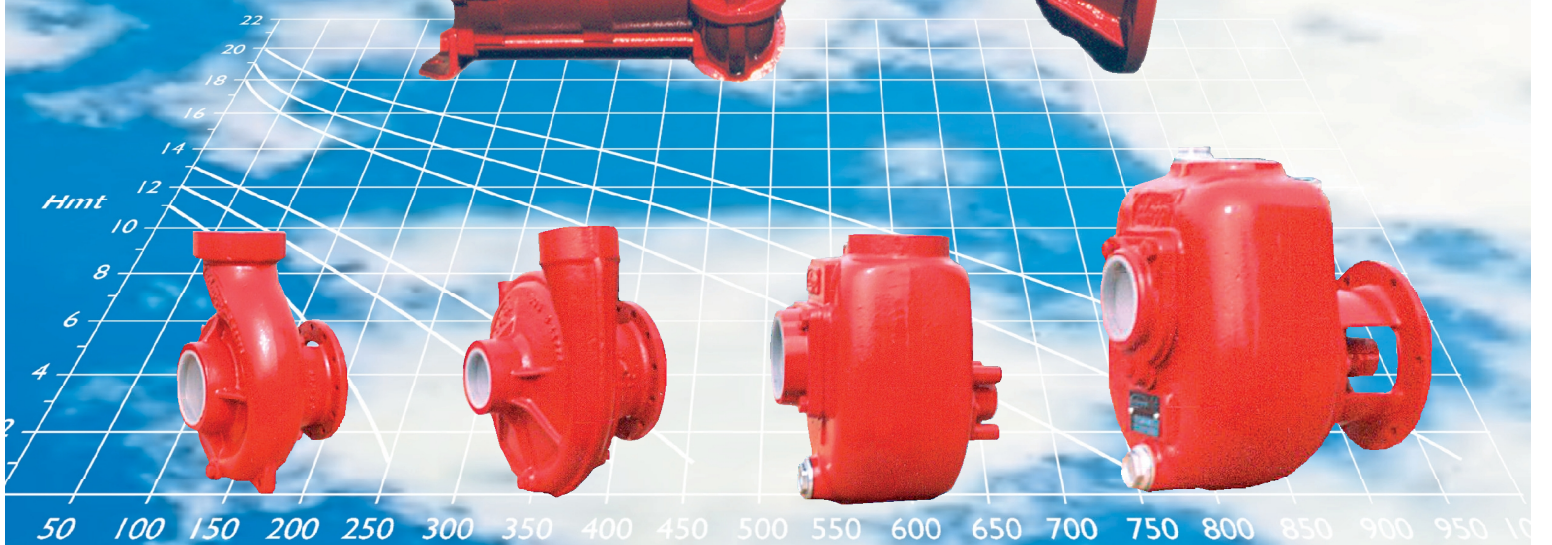


**POMPE FLANGIATE  
PER MOTORI DIESEL E BENZINA**

**FLANGED PUMPS  
FOR DIESEL AND GASOLINE ENGINES**

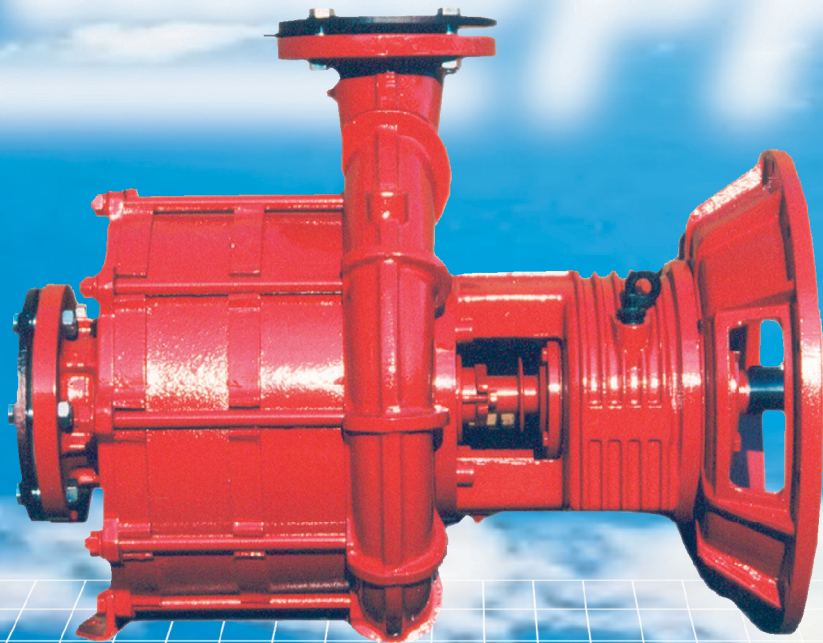




**Cadoppi**  
s.r.l.

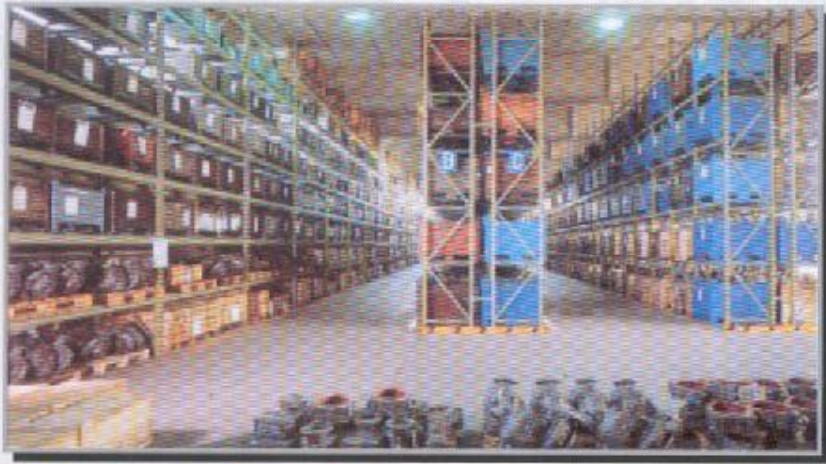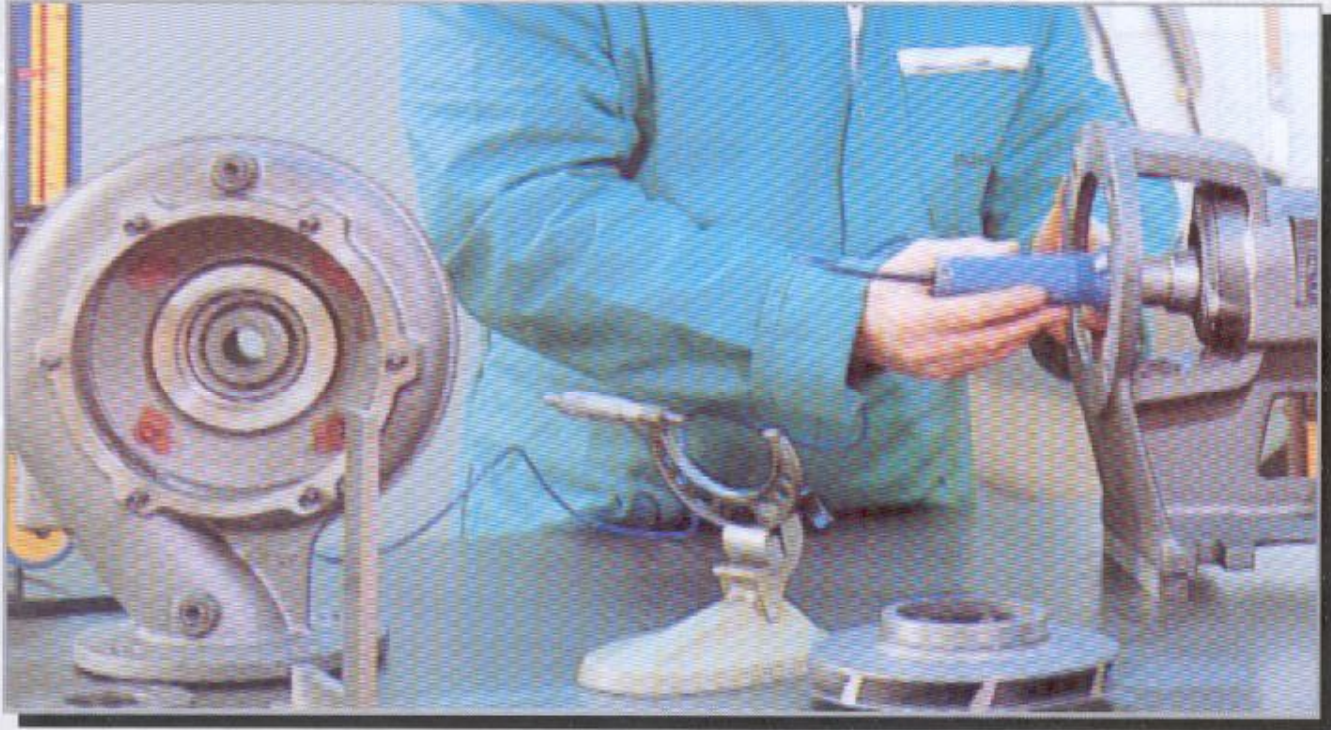

# Cadoppi

Esempi di pompe centrifughe e autoadescanti serie CF-CFA flangiate su diversi modelli di motori Diesel e Benzina

*Examples of centrifugal and self-priming pumps Series CFA-CF directly flanged to various models of gasoline and diesel engines*

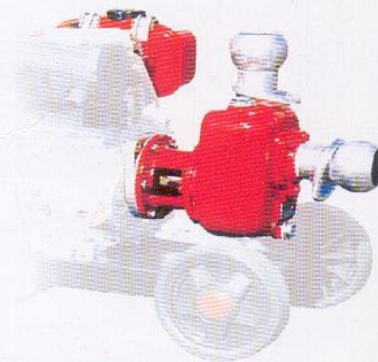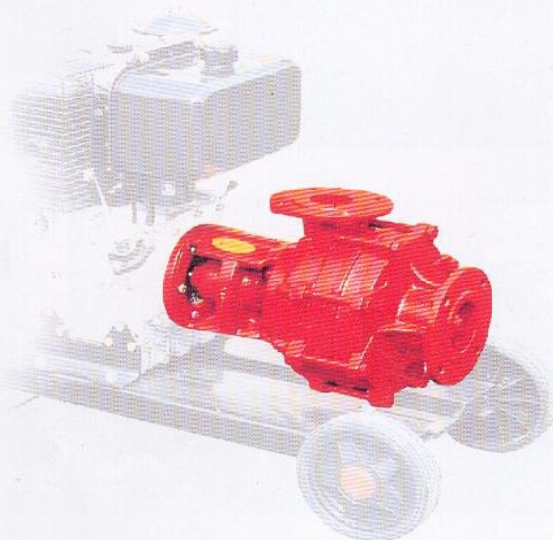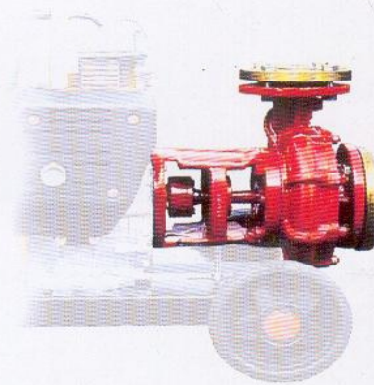



CF/CFA

Queste pompe CF e CFA, autodescanti e centrifughe, monostadio e pluristadio sono il fiore all'occhiello della Cadoppi.

Nessun'altra ditta al mondo con questa serie di pompe è in grado di avere tutte le flangiature idonee per qualsiasi motore diesel, benzina e miscela.

La Cadoppi S.r.l. infatti ha tutti gli accoppiamenti sia a motori con flangiature a norme internazionali "SAE", sia a motori con flangiature speciali.

Le pompe possono essere a bassa, media e alta prevalenza, per acque pulite o sporche, idonee per irrigazione, svuotamento, antincendio e acquedottistica.

Potenza fino a 250 Kw

Questo tipo di accoppiamento pompa / motore oltre a sveltire e facilitare la costruzione della motopompa garantisce un perfetto allineamento.

*These pumps CF/CFA, self priming and centrifugal, single stage and multistage are the feather in Cadoppi's cap.*

*No other manufacturer of similar pumps in the world is able to offer all the different flange arrangements for any kind of diesel, gasoline or mixture engine.*

*As a matter of fact Cadoppi S.r.l. may provide the possibility to couple its pumps both to engines with "SAE" International standard flanges, and to engine with special type of flange.*

*The pumps cover the low, middle and high head requirements.*

*They can work with clean or dirty water for irrigation, dewatering, fire fighting or water supply.*

*- Power up to 250 Kw.*

*- This type of direct pump/engine coupling, not only makes the assembling of the motorpump quicker and easier, but also guarantees a perfect shaft alignment.*



Pompa centrifuga monostadio CFA  
Single stage centrifugal pump CFA




Pompa autoadescante CF  
Self priming pump CF



Pompa centrifuga pluristadio CFA  
Centrifugal pump multistade CFA



CF - CFA

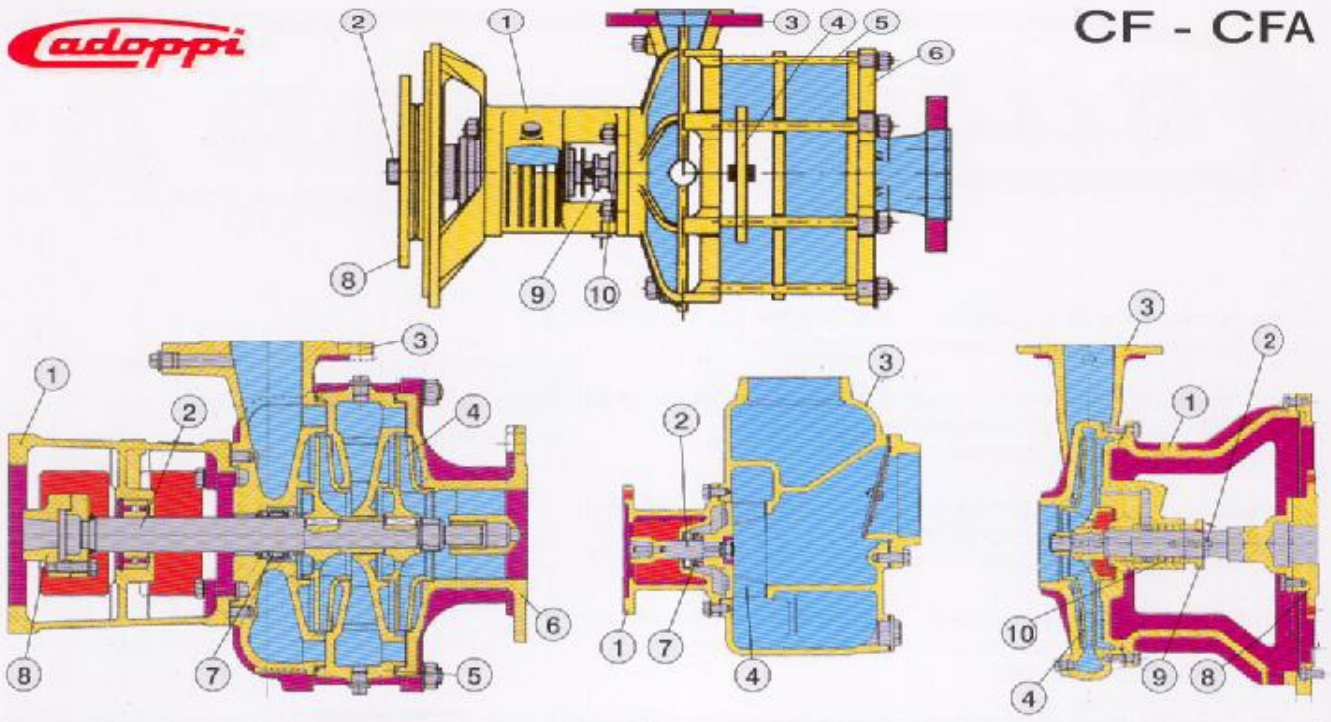

**1 SUPPORTO - SUPPORT**  
Ghisa grigia a grana fine - Grey fine grained cast iron

**2 ALBERO - SHAFT**  
Acciaio 38NCD4 - Steel 38NCD4

**3 CORPO POMPA - PUMP CASING**  
Ghisa grigia a grana fine - Grey fine grained cast iron

**4 GIRANTE - IMPELLER**  
Ghisa grigia a grana fine - Grey fine grained cast iron

**5 DIFFUSORE - DIFFUSER**  
Ghisa grigia a grana fine - Grey fine grained cast iron

**6 COPERCHIO POMPA - PUMP COVER**  
Ghisa grigia a grana fine - Grey fine grained cast iron

**7 TENUTA MECCANICA DI SERIE - MECHANICAL SEAL**  
Escluso i modelli CFA55, CFA65, CFA80, CFA652, CFA653, CFA552, CFA553, CFA802, CFA803, CFA100, CFA1002, CFA1003  
(Not for models CFA55, CFA65, CFA80, CFA652, CFA653, CFA552, CFA553, CFA802, CFA803, CFA100, CFA1002, CFA1003)

**8 SEMIGIUNTO - HALF COUPLING**  
Ghisa grigia a grana fine - Grey fine grained cast iron

**9 PREMITRECCIA - PACKING GLAND**  
Ghisa grigia a grana fine - Grey fine grained cast iron

**10 BADERNA - GLAND**

Serie Series **CF** (Autodescanti Self-priming)



Serie Series **CFA** (Centrifughe Centrifugal)





Pompe flangiate a motori  
Flanged pumps for engine



Serie **CF** <sup>e</sup> **CFA**  
Series and



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery l/1'	Prevalenza High Head H mt.
	Hp	Kw								DNa	DNm		
<b>500</b> STANDARD	5,0	3,7	3600	Ø 23 mm	Ø 105 mm			<b>CFA3-12109</b>	3600	3"	3"	900 650 400	5 12 16
								<b>CFA2-35164</b>	3400	2"	2"	300 200 100	33 39 44
								<b>CFA2-3140</b>	3600	2"	2"	530 220 120	18 33 35
								<b>CF2-A22</b> ☐	3400	2"	2"	560 320 160	10 18 20
								<b>CF3-A26</b> ☐	3400	3"	3"	1000 500 200	9 16 18
<b>520</b> STANDARD	6,7	4,9	3600	Ø 23 mm	Ø 105 mm			<b>CFA3-15139</b>	3000	3"	3"	1400 1100 700	11 16 20
								<b>CFA2-6144</b>	3600	2"	2"	650 500 300	22 28 34
								<b>CFA2-35174</b>	3600	2"	2"	350 250 150	43 51 55
								<b>CF2-A22</b> ☐	3600	2"	2"	650 400 100	11 19 24
								<b>CF3-A26</b> ☐	3600	3"	3"	1200 600 100	7 16,5 21
<b>530</b> STANDARD	7,5	5,5	3600	Ø 23 mm	Ø 105 mm			<b>CFA3-15139</b>	3000	3"	3"	1400 1100 700	11 16 20
								<b>CFA2-7160</b>	3200	2"	2"	810 520 270	25 34 39
								<b>CFA2-35174</b>	3600	2"	2"	350 250 150	43 51 55
								<b>CF2-A22</b> ☐	3600	2"	2"	650 400 100	11 19 24
								<b>CF3-A34</b> ☐	3400	3"	3"	1458 1300 330	7 10 18

☐ Pompa autoadescante - Self-priming pump

⊙ Viene montata con bocca mandata orizzontale  
This pump is mounted with horizontal delivery door



Pompe flangiate a motori  
Flanged pumps for engine



Serie **CF** <sup>e</sup> **CFA**  
Series and




Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery	Prevalenza High Head
	Hp	Kw								DNa	DNm		
<b>6LD400</b> STANDARD	8,5	6,3	3600	Ø 23 mm	Ø 105 mm			<b>CFA4-25130</b>	3000	4"	4"	2300 1800 1200	8 12 16
								<b>CFA4-19139</b>	3000	4"	4"	1800 1250 930	12 18 20
								<b>CFA50-6190</b>	2900	65 mm	50 mm	800 600 350	25 34 40
								<b>CFA2-7180</b>	3000	2"	2"	1100 700 350	18 33 42
								<b>CFA50-4198</b>	3000	65 mm	50 mm	690 440 278	30 40 46
								<b>CFA2-35180</b>	3600	2"	2"	420 320 160	39 50 60
								<b>CF4-A45</b> □	3400	4"	4"	1650 920 400	8 14 18
<b>15LD400</b>  <b>6LD400</b> STANDARD  <b>15LD440</b>	10	7,3	3600	Ø 23 mm	Ø 105 mm			<b>CFA4-25139</b>	3000	4"	4"	2350 1800 1290	8 14 18
								<b>CFA50-6190</b>	2900	65 mm	50 mm	800 600 350	25 34 40
								<b>CFA50-4202</b>	3000	65 mm	50 mm	600 500 300	38 42 48
	10	7,3	3600					<b>CFA602-6152</b>	3000	60 mm	50 mm	600 400 200	34 50 60
								<b>CF3-A34</b> □	3600	3"	3"	1500 800 100	8 15,7 21
								<b>CF4-A45</b> □	3600	4"	4"	1900 1000 100	7 16 21
												<b>CF3-A12</b> □	3000
<b>3LD450</b> STANDARD	10,2	7,5	3000	Ø 24 mm	Ø 105 mm			<b>CFA4-25139L</b>	2850	4"	4"	2350 1800 1290	7 12 17
								<b>CFA50-6190L</b>	2900	65 mm	50 mm	800 600 350	25 34 40
								<b>CFA50-4202L</b>	2850	65 mm	50 mm	600 500 300	33 36 41
								<b>CFA602-6152L</b>	2800	60 mm	50 mm	600 400 200	26 44 52

□ Pompa autoadescante - *Self-priming pump*


⊙ Viene montata con bocca mandata orizzontale  
*This pump is mounted with horizontal delivery door*



Pompe flangiate a motori  
Flanged pumps for engine



Serie **CF** <sup>e</sup> **CFA**  
Series and



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery l/1'	Prevalenza High Head H mt.
	Hp	Kw								DNa	DNm		
<b>3LD510</b> STANDARD	12,2	9	3000	Ø 24 mm	Ø 105 mm			<b>CFA4-25139L</b>	2850	4"	4"	2350 1800 1290	7 12 17
								<b>CFA702-5157L</b>	3000	80 mm	60 mm	750 400 300	25 55 59
								<b>CFA50-6195L</b>	2900	65 mm	50 mm	800 600 350	28,6 37 42
								<b>CFA50-4206L</b>	2850	65 mm	50 mm	680 600 271	35 38 48
								<b>CFA602-6152L</b>	3000	60 mm	50 mm	600 400 200	34 50 60
								<b>CFA603-6152L</b>	3000	60 mm	50 mm	530 320 200	50 80 92
								<b>CF3-A16L</b> ☐	3000	3"	3"	1000 500 100	7 34 47
								<b>CF4-A45L</b> ☐	3600	4"	4"	2050 1300 100	5 14 21
<b>LDA91</b> STANDARD	14,3	10,5	3000	Ø 30 mm	Ø 105 mm			<b>CFA50-6210</b>	2900	65 mm	50 mm	900 600 350	32 44,5 49
<b>LDA96</b> STANDARD	14,3	10,5	3000					<b>CFA604-6152</b>	3000	60 mm	50 mm	600 400 200	50 78 100
<b>4LD640</b> STANDARD	15,0	11,0	3000					<b>CFA702-5157</b>	3000	80 mm	60 mm	750 400 300	25 55 59
<b>7LD665</b> STANDARD	15,0	11,0	3000					<b>CFA50-11196</b>	2650	65 mm	50 mm	1450 1300 1200	27 32 34
<b>25LD330/2</b>	16,3	12,0	3600					<b>CFA50-25139A</b>	3000	4"	4"	2350 1800 1290	8 14 18
								<b>CF3-A20D</b> ☐	3000	3"	3"	1200 500 200	12 39 46
<b>7LD740</b> STANDARD	16,3	12,0	3000	Ø 30 mm	Ø 105 mm			<b>CFA50-11196</b>	2850	65 mm	50 mm	1450 1300 1200	34 39 41
<b>LDA100</b> STANDARD								<b>CFA702-5164</b>	3000	80 mm	60 mm	750 400 300	32 60,5 64
<b>4LD705</b> STANDARD													


☐ Pompa autoadescante - Self-priming pump

⊙ Viene montata con bocca mandata orizzontale  
This pump is mounted with horizontal delivery door





Pompe flangiate a motori  
Flanged pumps for engine



Serie **CF** <sup>e</sup> **CFA**  
Series and




Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery	Prevalenza High Head
	Hp	Kw								DNa	DNm		
4LD820 STANDARD  LDA820 STANDARD	17,7	13,0	2600	Ø 30 mm	Ø 105 mm			<b>CFA55-9230D</b>	2600	65 mm	55 mm	1120 950 780	42 45 50
								<b>CFA50-11196</b>	2600	65 mm	65 mm	1450 1300 1200	25 30 32
								<b>CFA702-5172</b>	2600	80 mm.	60 mm	700 500 200	36 49 60
								<b>CF3-A24D</b> □	2600	3"	3"	1200 500 280	7 30 34
								<b>CF4-A47D</b> □	2600	4"	3"	2500 1500 600	11 23 27
25LD425/2	19	14		Ø 30 mm	Ø 105 mm			<b>CFA50-11196</b>	2850	65 mm	50 mm	1450 1300 1200	34 39 41
								<b>CFA702-5167</b>	3000	80 mm	60 mm	750 400 300	45 64 67,5
								<b>CFA80-16180D</b>	2600	100 mm	80 mm	2000 1600 1000	19 20 25
								<b>CF3-A24D</b> □	3000	3"	3"	1300 800 300	11 35 50
12LD435-2B1	20	14,7	3600	Ø 70 mm	Ø 105 mm			<b>CFA50-11196LD</b>	2850	65 mm	50 mm	1450 1300 1200	34 39 41
								<b>CFA80-16180LD</b>	2600	100 mm	80 mm	2000 1600 1000	19 20 25
								<b>CFA702-5167LD</b>	3000	80 mm	60 mm	800 500 200	33 58,5 72
12LD475-2	21,5	15,8	3000	Ø 70 mm	Ø 105 mm			<b>CFA605-6152LD</b>	3000	60 mm	50 mm	550 350 240	62 94 108
								<b>CFA702-5167LD</b>	3000	80 mm	60 mm	800 500 200	33 58,5 72

□ Pompa autoadescante - Self-priming pump

⊙ Viene montata con bocca mandata orizzontale  
This pump is mounted with horizontal delivery door



Pompe flangiate a motori  
Flanged pumps for engine



Serie **CF** <sup>e</sup> **CFA**  
Series and



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery	Prevalenza High Head
	Hp	Kw								DNa	DNm		
12LD477-2	23,1	17	3600	Ø 38 mm	Ø 125 mm			CFA605-6152B	3000	65 mm	50 mm	600 400 200	50 83 118
								CFA702-5167B	3000	80 mm	60 mm	800 500 200	33 58,5 72
								CFA80-16180B ⊙	2600	100 mm	80 mm	2000 1600 1000	19 20 25
								CFA80-18180B ⊙	2600	100 mm	80 mm	2800 2000 1400	7 21 28,5
								CFA55-6230B ⊙	2900	65 mm	55 mm	1100 700 400	31 54 61
904 8LD600-2 9LD560-2 9LD561-2 914 8LD665-2 9LD625-2 8LD740-2 9LD626-2	25 25,6 26 26 28 28,5 28,5 28,5 28,5	18,4 18 19 20 20,6 21 21 21 21	3000	Ø 305 mm	Ø 60 mm			CFA80-16185	2900	100 mm	80 mm	2000 1600 1000	34 40 44
								CFA55-6240	2900	65 mm	55 mm	1100 800 600	46 62 68
								CFA552-6240	2600	65 mm	55 mm	1000 700 500	68 93 102
								CF4-A47L □	3000	4"	4"	3000 1500 750	15 32 36
								CFA80-16185L	2900	100 mm	80 mm	2000 1600 1000	34 40 44
								CFA55-6240L	2900	65 mm	55 mm	1100 800 600	46 62 68
								CFA552-6240L	2600	65 mm	55 mm	1000 700 500	68 93 102
11LD522/3 SAE 5	37,9	28,0	3600	Ø 314,32 mm	Ø 225 mm			CFA80-16210R	2600	100 mm	80 mm	2000 1400 1000	37 43 45
								CFA55-6260R	2600	65 mm	55 mm	1000 700 400	45 62 70,3
								CFA552-6250R	2600	65 mm	55 mm	1000 700 350	74 100 114
								CF3-A24R □	3000	3"	3"	1600 800 300	16 57 69

□ Pompa autoadescante - Self-priming pump

⊙ Viene montata con bocca mandata orizzontale  
This pump is mounted with horizontal delivery door





Pompe flangiate a motori  
Flanged pumps for engine

**KOHLER** engines  
BORN TO RUN™

Serie **CF** e **CFA**  
Series



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	Tipo albero Shaft type			Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery l/1'	Prevalenza High Head H mt.
	Hp	Kw		2	3	4			DNa	DNm		
CH6	6	4,47	3600	●			CF2-A22B2 □	3400	2"	2"	650 475 210	8 15 20
				●			CF3-A26B2 □	3400	3"	3"	1000 500 200	9 16 18
				●			CFA1-3155B2	3600	1"	1"	120 80 30	44 53 60
				●			CFA2-3140B2	3600	2"	2"	530 220 120	18 33 35
				●			CFA3-12109B2	3600	3"	3"	900 650 400	5 12 16
CH11	11	8,2	3600		●		CFA4-19139B3	3000	4"	4"	1800 1250 930	12 18 20
					●		CFA2-7180B3	3000	2"	2"	1100 700 350	18 33 42
					●		CFA3-15139B3	3000	3"	3"	1400 1100 700	11 16 20
					●		CF3-A34B3 □	3400	3"	3"	1458 1300 330	7 10 18
					●		CF4-A42B3 □	3400	4"	4"	1650 920 400	8 14 18
					●		CFA4-25139B3	2850	4"	4"	2350 1800 1290	7 12 17
					●		CFA50-6195B3	2900	65 mm	50 mm	800 600 350	28,6 37 42
					●		CFA50-4206B3	2850	65 mm	50 mm	680 600 271	35 38 48
					●		CFA602-6152B3	3000	65 mm	60 mm	600 400 200	34 50 60
					●		CFA603-6152B3	3000	65 mm	60 mm	530 320 200	50 80 92
					●		CF4-A45B3 □	3400	4"	4"	1850 1100 620	8 14 17

□ Pompa autoadescante - Self-priming pump



Pompe flangiate a motori  
Flanged pumps for engine

KOHLERengines  
BORN TO RUN™

Serie **CF** e **CFA**  
Series



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	Tipo albero Shaft type			Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery l/1'	Prevalenza High Head H mt.
	Hp	Kw		2	3	4			DNa	DNm		
CH13	13	9,75	3600		●		CFA4-25139B3	2850	4"	4"	2350 1800 1290	7 12 17
					●		CFA50-6195B3	2900	65 mm	50 mm	800 600 350	28,6 37 42
					●		CFA50-4206B3	2850	65 mm	50 mm	680 600 271	35 38 48
					●		CFA602-6152B3	3000	65 mm	60 mm	600 400 200	34 50 60
					●		CFA603-6152B3	3000	65 mm	60 mm	530 320 200	50 80 92
					●		CF3-A16B3 □	3000	3"	3"	1000 500 100	7 34 47
					●		CF4-A45B3 □	3400	4"	4"	1850 1100 620	8 14 17
CH15	15	11,2	3600		●		CFA4-25139B3	2850	4"	4"	2350 1800 1290	7 12 17
					●		CFA50-6195B3	2900	65 mm	50 mm	800 600 350	28,6 37 42
					●		CFA50-4206B3	2850	65 mm	50 mm	680 600 271	35 38 48
					●		CFA602-6152B3	3000	65 mm	60 mm	600 400 200	34 50 60
					●		CFA603-6152B3	3000	65 mm	60 mm	530 320 200	50 80 92
					●		CF3-A16B3 □	3000	3"	3"	1000 500 100	7 34 47
					●		CF4-A45B3 □	3400	4"	4"	1850 1100 620	8 14 17

□ Pompa autoadescante - Self-priming pump



Pompe flangiate a motori  
Flanged pumps for engine

KOHLERengines  
BORN TO RUN™

Serie **CF** e **CFA**  
Series



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	Tipo albero Shaft type			Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery l/1'	Prevalenza High Head H mt.
	Hp	Kw		2	3	4			DNa	DNm		
TH16	16	11,9	3600		●		<b>CFA50-11196B</b>	3000	65 mm	50 mm	1450 1300 1200	42 45 47
					●		<b>CFA50-6210B4</b>	2900	65 mm	50 mm	900 600 350	32 44,5 49
					●		<b>CFA702-5164B4</b>	3000	80 mm	60 mm	750 400 300	32 60,5 64
					●		<b>CF3-A20B4</b> □	3000	3"	3"	1200 500 200	12 39 46
					●		<b>CF4-A45B4</b> □	3400	3"	3"	1850 1100 620	8 14 17
					●		<b>CFA4-25139B4</b>	3000	4"	4"	2350 1800 1290	8 14 18
TH18	18	14	3600		●		<b>CFA50-11196B4</b>	3000	65 mm	50 mm	1450 1300 1200	42 45 47
					●		<b>CFA603-6152B4</b>	3000	65 mm	60 mm	530 320 200	50 80 90
					●		<b>CFA604-6152B4</b>	3000	65 mm	60 mm	600 400 200	50 78 100
					●		<b>CFA702-5164B4</b>	3000	80 mm	60 mm	750 400 300	32 60,5 64
					●		<b>CFA100-9230B4</b>	2600	100 mm	60 mm	1120 950 780	42 45 50
					●		<b>CF3-A20B4</b> □	3000	3"	3"	1200 500 200	12 39 46
					●		<b>CF4-A45B4</b> □	3400	4"	4"	1850 1100 620	8 14 17


□ Pompa autoadescante - Self-priming pump



Pompe flangiate a motori  
Flanged pumps for engine

**KOHLER**engines  
BORN TO RUN™

Serie **CF**<sup>e</sup> and **CFA**  
Series

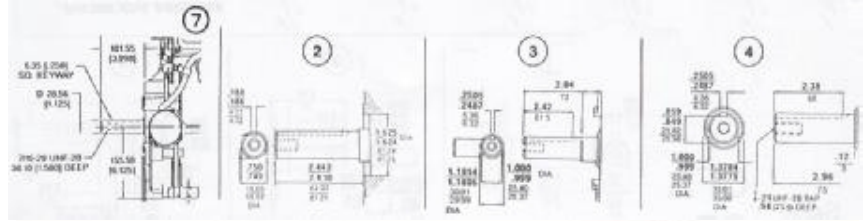

Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	Tipo albero Shaft type				Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery l/1'	Prevalenza High Head H mt.
	Hp	Kw		2	3	4	7			DNa	DNm		
CH18	18	13,4	3600					● CFA50-11196B7	2850	65 mm	50 mm	1450 1300 1200	34 39 41
								● CFA50-6210B7	2900	65 mm	50 mm	900 600 350	32 44,5 49
								● CFA702-5164B7	3000	80 mm	60 mm	750 400 300	32 60,5 64
								● CFA4-25139B7	3000	4"	4"	2350 1800 1290	8 14 18
								● CF3-A20B7 □	3000	3"	3"	1200 500 200	12 39 46
CH20	20	14,9	3600					● CFA120-285167B7	2600	120 mm	100 mm	2800 2400 2000	13 18 21
								● CFA100-9230B7	2600	100 mm	80 mm	1120 950 780	42 45 50
								● CFA702-5172B7	3000	80 mm	60 mm	750 400 300	51 71 74
CH22	22	16,4	3600					● CFA605-6152B7	3000	65 mm	60 mm	550 350 250	62 94 108
								● CF3-A24B7 □	3000	3"	3"	1300 500 200	11 45 52
CH25	25	18,4	3600					● CFA100-9238B7	2650	100 mm	80 mm	1150 900 700	50 58 62
								● CFA120-285167B7	2600	120 mm	100 mm	2800 2400 2000	13 18 21
								● CFA702-5172B7	3000	80 mm	60 mm	750 400 300	51 71 74
								● CF3-A24B7 □	3000	3"	3"	1300 500 200	11 45 52

□ Pompa autoadescante - Self-priming pump



Pompe flangiate a motori  
Flanged pumps for engine



Serie **CF** <sup>e</sup> **CFA**  
Series and



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery	Prevalenza High Head
	Hp	Kw								DNa	DNm		
<b>RY 50</b> STANDARD	5,0	3,7	3600	Ø 23 mm	Ø 105 mm			<b>CFA2-3140</b>	3600	2"	2"	530 220 120	18 33 35
<b>MICRO 51</b> STANDARD	5,0	3,7						<b>CFA3-12120</b>	3600	3"	3"	1050 800 500	10 16 21
<b>MICRO 61</b> STANDARD	6,0	4,4						<b>CFA2-35164</b>	3600	2"	2"	300 200 100	36 43 48
<b>MD 75.1</b> STANDARD	6,5	4,8						<b>CF2-A17</b> □	3400	2"	2"	560 320 160	10 18 20
<b>HT 51</b> STANDARD	5,0	3,7						<b>CF3-A26</b> □	3400	3"	3"	1000 500 200	9 16 18
<b>RY70</b> STANDARD	6,8	5,0	3600	Ø 23 mm	Ø 105 mm			<b>CFA3-15139</b>	3000	3"	3"	1400 1100 700	11 16 20
<b>RY75</b> STANDARD	7,5	5,5	3600	Ø 23 mm	Ø 105 mm			<b>CFA2-6144</b>	3600	2"	2"	650 500 300	22 28 34
								<b>CFA2-35174</b>	3600	2"	2"	350 250 150	41 51 55
								<b>CFA2-7160</b>	3200	2"	2"	810 520 270	25 34 39
								<b>CF3-A26</b> □	3600	3"	3"	1200 600 100	7 16,5 21
								<b>CF3-A34</b> □	3400	3"	3"	1458 1300 330	7 10 18
<b>CF2-A22</b> □	3600	2"	2"	650 400 100	11 19 24								
<b>RF80</b> STANDARD	8,2	6,0	3000	Ø 23 mm	Ø 105 mm			<b>CFA50-6190</b>	2900	65 mm	50 mm	800 600 350	25 34 40
<b>MC71</b> STANDARD	8,5	6,2	3600					<b>CFA2-7180</b>	3000	2"	2"	1100 700 350	18 33 42
								<b>CFA2-35180</b>	3600	2"	2"	420 320 160	39 50 60
<b>MC70</b> STANDARD	8,8	6,5	3600					<b>CFA50-4198</b>	3000	65 mm	50 mm	690 440 278	30 40 46
<b>RF81</b> STANDARD	8,8	6,5	3600					<b>CFA50-4195</b>	3000	65 mm	50 mm	400 300 200	45 49 52
								<b>CFA4-25130</b>	3000	4"	4"	2300 1800 1200	8 12 16
<b>MD95.0</b> STANDARD	8,8	6,5	3600					<b>CFA4-19139</b>	3000	4"	4"	1800 1250 930	12 18 20
								<b>CF4-A42</b> □	3400	4"	4"	1650 920 400	8 14 18

□ Pompa autoadescante - Self-priming pump



Serie **CF** <sup>e</sup> **CFA**  
Series and



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery l/1'	Prevalenza High Head H mt.								
	Hp	Kw								DNa	DNm										
RY103 STANDARD	10,0	7,3	3600	Ø 23 mm	Ø 105 mm			CFA4-25139	3000	4"	4"	2350 1800 1290	8 14 18								
								CFA50-6190	2900	65 mm	50 mm	800 600 350	25 34 40								
								CFA50-4202	3000	65 mm	50 mm	600 500 300	38 42 48								
								CFA602-6152	3000	60 mm	50 mm	600 400 200	34 50 60								
								CF3-A34 □	3600	3"	3"	1500 800 100	8 15,7 21								
								CF4-A42 □	3600	4"	4"	1900 1000 100	7 16 21								
								CF3-A12 □	3000	3"	3"	800 500 100	9 24 41								
RY125 STANDARD	12,0	8,8	3600	Ø 24 mm	Ø 105 mm			CFA702-5157L	3000	80 mm	60 mm	750 400 300	25 55 59								
								CFA4-25139L	3000	4"	4"	2350 1800 1290	8 13 18								
								CFA50-6195L	2900	65 mm	50 mm	800 600 350	28,6 37 42								
								CFA50-4206L	3000	65 mm	50 mm	680 600 271	39 42 52								
								CFA602-6152L	3000	60 mm	50 mm	600 400 200	34 50 60								
								CFA603-6152L	3000	60 mm	50 mm	530 320 200	50 80 92								
								CF3-A16L □	3000	3"	3"	1000 500 100	7 34 47								
								CF4-A45L □	3600	4"	4"	2050 1300 100	5 14 21								
RF90 STANDARD	10,0	7,4	3000	Ø 23 mm	Ø 105 mm			CF3-A34 □	3600	3"	3"	1500 800 100	8 15,7 21								
								CF4-A42 □	3600	4"	4"	1900 1000 100	7 16 21								
								CF3-A12 □	3000	3"	3"	800 500 100	9 24 41								
								RF91 STANDARD	11,0	8,1	3600	Ø 23 mm	Ø 105 mm			CFA4-25139	3000	4"	4"	2350 1800 1290	8 14 18
																CFA50-6190	2900	65 mm	50 mm	800 600 350	25 34 40
																CFA50-4202	3000	65 mm	50 mm	600 500 300	38 42 48
																CFA602-6152	3000	60 mm	50 mm	600 400 200	34 50 60

□ Pompa autoadescante - Self-priming pump



Pompe flangiate a motori  
Flanged pumps for engine



Serie **CF** <sup>e</sup> **CFA**  
Series and



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery	Prevalenza High Head
	Hp	Kw								DNa	DNm		
<b>RD920</b> STANDARD	13,6	10,0	3000	Ø 30 mm	Ø 125 mm			<b>CFA702-5157R</b>	3000	80 mm	60 mm	750 400 300	25 55 59
								<b>CFA4-25139R</b>	3000	4"	4"	2350 1800 1290	8 14 18
								<b>CFA50-6195R</b>	2900	65 mm	50 mm	800 600 350	28,6 37 42
								<b>CFA50-4206R</b>	3000	65 mm	50 mm	680 600 271	39 42 52
								<b>CFA50-11190R</b>	2650	65 mm	50 mm	1450 1300 1200	24 28 30
								<b>CFA603-6152R</b>	3000	60 mm	50 mm	530 320 200	50 80 92
								<b>CFA602-6152R</b>	3000	60 mm	50 mm	600 400 200	34 50 60
								<b>CF3-A16R</b> □	3000	3"	3"	1000 500 100	7 34 47
								<b>CF4-A45R</b> □	3600	4"	4"	2050 1300 100	5 14 21
<b>MD150</b> STANDARD	13,6	10,0	3000	Ø 30 mm	Ø 105 mm			<b>CFA50-11196</b>	2650	65 mm	50 mm	1450 1360 1200	27 32 34
								<b>CFA604-6152</b>	3000	60 mm	50 mm	600 400 200	50 78 100
								<b>CFA702-5157</b>	3000	80 mm	60 mm	750 400 300	25 55 59
								<b>CFA4-25139R</b>	3000	4"	4"	2350 1800 1290	8 14 18
								<b>CFA50-6210</b>	2900	65 mm	50 mm	900 600 350	33 44,5 49
								<b>CF3-A20</b> □	3000	3"	3"	1200 500 200	12 39 46
<b>MD190</b> STANDARD	17,0	14,0	3000	Ø 30 mm	Ø 105 mm			<b>CFA50-11196</b>	2850	65 mm	50 mm	1450 1300 1200	34 39 41
								<b>CFA80-16180D</b>	2600	100 mm	80 mm	2000 1600 1000	19 20 25
								<b>CFA702-5164</b>	3000	80 mm	60 mm	750 400 300	32 60,5 64
								<b>CF3-A16D</b> □	3600	3"	3"	1200 600 100	9 45 66
								<b>CF3-A47D</b> □	2600	4"	4"	2500 1500 600	11 23 27
<b>MD191</b> STANDARD	19,0	12,5	3600	Ø 30 mm	Ø 105 mm								

□ Pompa autoadescante - Self-priming pump

Serie **CF** <sup>e</sup> **CFA**  
Series and



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery	Prevalenza High Head
	Hp	Kw								DNa	DNm		
<b>RD180</b> STANDARD	16,3	12,0	3000	Ø 38 mm	Ø 125 mm			<b>CFA50-11196B</b> ☉	2850	80 mm	60 mm	1450 1300 1200	34 39 41
								<b>CFA702-5164B</b>	3000	80 mm	60 mm	750 400 300	32 60,5 64
								<b>CFA604-6152B</b>	3000	60 mm	50 mm	600 400 200	50 78 100
								<b>CFA80-16180B</b> ☉	2600	100 mm	80 mm	2000 1600 1000	19 20 25
<b>RD200</b> STANDARD	18,0	13,5	3000	Ø 38 mm	Ø 125 mm			<b>CFA605-6152B</b>	3000	60 mm	50 mm	550 350 240	62 94 108
								<b>CFA702-5172B</b>	3000	80 mm	60 mm	800 500 200	48 67 76
								<b>CFA80-16180B</b> ☉	2600	100 mm	80 mm	2000 1600 1000	19 20 25
<b>RD220</b> STANDARD	22,5	16,5	3000	Ø 38 mm	Ø 125 mm			<b>CFA55-6230B</b> ☉	2900	65 mm	55 mm	1100 700 400	31 54 61
								<b>CFA80-18180B</b> ☉	2600	100 mm	80 mm	2800 2000 1400	7 21 28,5
								<b>CFA702-5172B</b>	3000	80 mm	60 mm	800 500 200	48 67 76
								<b>CFA605-6152B</b>	3000	65 mm	50 mm	600 400 200	50 83 118
<b>RD240</b> STANDARD	24,4	18,0	3000	Ø 38 mm	Ø 125 mm			<b>CFA65-16178B</b> ☉	2900	80 mm	65 mm	1800 1300 900	23 35 40
								<b>CFA55-9238B</b> ☉	2650	65 mm	55 mm	1150 900 700	50 58 62
								<b>CFA55-6240B</b> ☉	2900	65 mm	55 mm	1100 700 400	46 65 71
<b>RD211</b> STANDARD	23,1	17,0	3600	Ø 38 mm	Ø 125 mm			<b>CFA80-16185</b>	2900	100 mm	80 mm	2000 1600 1000	34 40 44
								<b>CFA55-6240</b>	2900	65 mm	55 mm	1100 800 600	46 62 68
								<b>CFA552-6240</b>	2600	65 mm	55 mm	1000 700 500	68 93 102
								<b>CF4-A47L</b> □	3000	4"	4"	3000 1500 750	25 32 36

□ Pompa autoadescante - Self-priming pump

☉ Viene montata con bocca mandata orizzontale  
This pump is mounted with horizontal delivery door



Pompe flangiate a motori  
Flanged pumps for engine



Serie **CF** <sup>e</sup> **CFA**  
Series and



Tipo motore Type motor	Potenza motore Power motor		Giri motore/1' RPM Motor	A	C	K	X	Tipo Pompa Type Pump	Giri pompa/1' RPM pump	Bocche pompa Ports Pump		Portata Delivery	Prevalenza High Head
	Hp	Kw								DNa	DNm		
<b>MD350</b> SAE 5	35,4	26,0	3000				Ø 314,32 mm Ø 225 mm	<b>CFA80-16210R</b>	2600	100 mm	80 mm	2000 1400 1000	37 43 45
								<b>CFA55-6260R</b>	2600	65 mm	55 mm	1000 700 400	45 62 70,3
								<b>CFA552-6250R</b>	2600	65 mm	55 mm	1000 700 350	74 100 114
								<b>CF3-A24R</b> □	3000	3"	3"	1600 800 300	16 57 69
<b>RP360</b> STANDARD  <b>RP 380</b> STANDARD	36,0	26,5	3000				Ø 322 mm Ø 148 mm	<b>CFA80-18210H</b>	2600	100 mm	80 mm	2500 1800 1400	32 41 44
								<b>CFA65-9240H</b>	2600	80 mm	65 mm	1500 1200 700	38 50 63
	38,0	28,0	3000					<b>CFA552-6260H</b>	2600	65 mm	55 mm	1000 700 500	80 109 120
								<b>CFA553-6240H</b>	2600	65 mm	55 mm	1000 700 350	88 122 140
<b>SP420</b> STANDARD	42,0	30,8	3000				Ø 340 mm Ø 60 mm	<b>CFA80-18190</b>	2900	100 mm	80 mm	2300 1800 1400	41 47 50
								<b>CFA65-9235</b>	2900	80 mm	65 mm	1700 1200 900	45 62 68
								<b>CFA55-6260L</b>	2900	65 mm	55 mm	1100 800 400	68 82 90
								<b>CFA552-6260L</b>	2900	65 mm	55 mm	1000 700 500	106 135 144
								<b>CFA553-6260L</b>	2400	65 mm	55 mm	1000 700 300	90 124 143

□ Pompa autoadescante - Self-priming pump



**Cadoppi s.r.l.**

Via S. Allende nr. 3

42020 Montecavolo - RE - Italy

Tel. 0039 0522 245026 r.a.

Telefax 0039 0522 245018

E-mail: [info@cadoppi.191.it](mailto:info@cadoppi.191.it)

[www.cadoppi.com](http://www.cadoppi.com)